

FULLRIVER[®]

BATTERY



AGM BATTERY GUIDE


2025

WHY CHOOSE FULLRIVER?

Since 1995, our goal has been to prove that AGM technology was not only superior to other battery types, but our batteries were also superior to other AGM manufacturers. Third party testers and customers' in-house engineering teams proved this to be true. Now, our goal is to expand our products into a broadening list of applications. We fine-tuned our battery technology, added application specific batteries, included more battery types, and offer an extensive array of battery accessories and chargers for the complete solution. From solar to racing, AWP to marine, and everything in between, there is a Fullriver battery for every application.



BATTERY TERMINAL CONFIGURATIONS

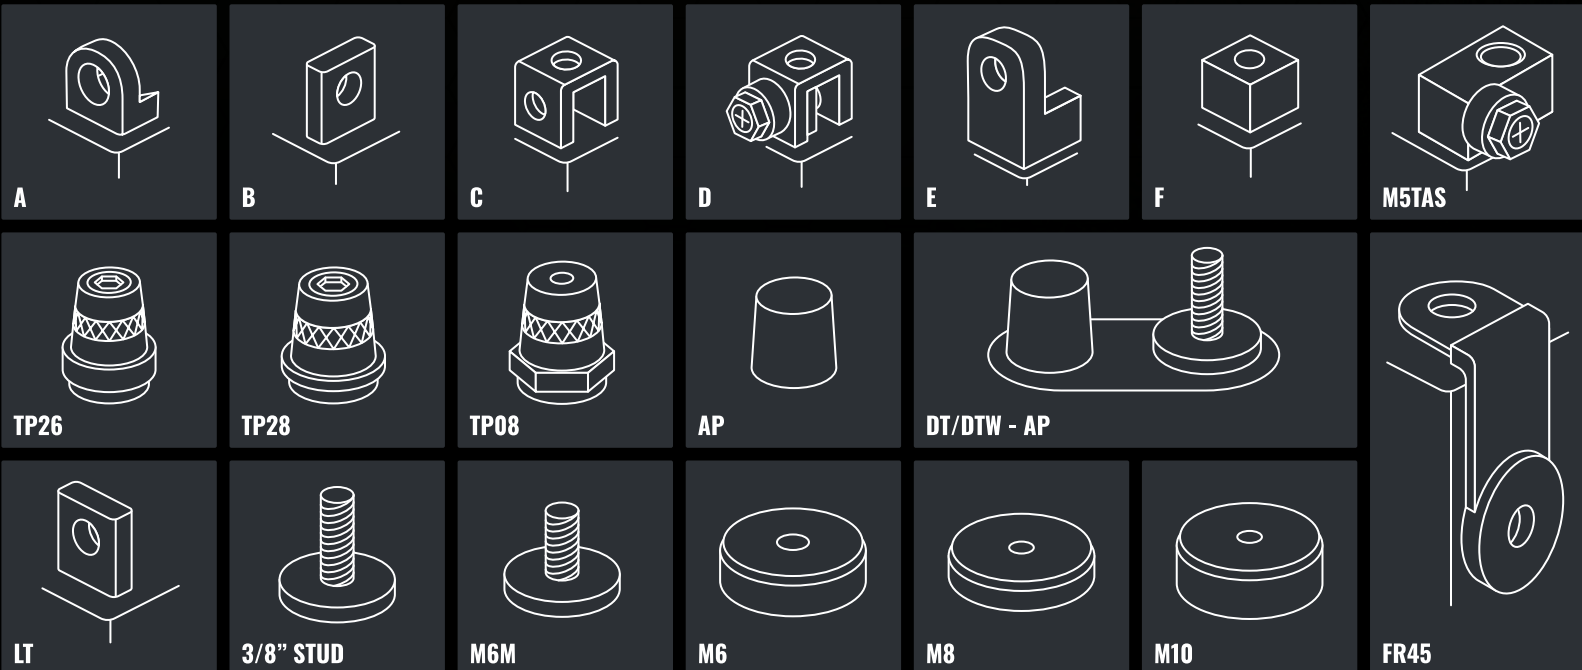

EGL SERIES

SUPREME DEEP CYCLE BATTERY

When EGL first hit our labs at Fullriver, we could hardly believe the performance we were witnessing. This battery is the fruit of going back to the design table and re-working everything with a “no holds barred” approach.



MODEL	GROUP SIZE	RES CAP 25	C10	TERMINAL	LENGTH	DIMENSIONS mm WIDTH	HEIGHT	WEIGHT kg/Lbs
EGL200-6	GC2	375	172	M8	260	181	259	33.6 / 74.1
EGL220-6	GC2H	470	198	M8	262	181	269	37.5 / 82.7
EGL170-8	GC8	330	149	M8	260.4	182.2	288	37.0 / 81.6
EGL100-12	31	175	90	M8	329	171	227	33.8 / 74.5

FULLRIVER

PREMIUM DEEP CYCLE BATTERY

The DC Series is what put Fullriver Battery on the map nearly 30 years ago. What was a standout deep-cyle battery back then, has only gotten better with time. Not only is it rare to find a manufacturer who makes batteries like this, but the amount that do so in an AGM format is truly rare.



MODEL	GROUP SIZE	CCA	C10	TERMINAL	LENGTH	DIMENSIONS mm WIDTH	HEIGHT	WEIGHT kg/Lbs
DC1150-2	903	x	1040	M10	295	179	411	57.6 / 127.0
DC220-6	27	x	198	M8	306	174	226	32.7 / 72.1
DC224-6	GC2	x	194	M8 + TP08	260	180	272	31.1 / 68.6
DC245-6		x	221	AP	244	190	275	32.9 / 72.5
DC250-6	GC2H	x	229	M8 + TP08	262	181	283	35.8 / 78.9
DC335-6	902	x	300	DT	295	178	366	47.5 / 104.7
DC400-6	903	x	374	DT	295	179	424	56.5 / 124.6
DC180-8	GC8	x	165	M8	260	182	272	34.4 / 75.9
DC200-8	GC8H	x	180	M8	260	182	299	37.7 / 83.1
DC35-12	U1	x	32	M6	196	131	167	11.5 / 25.4
DC55-12	22NF	x	50	M6	229	138	212	17.6 / 38.8
DC85-12	24	x	77	M8 + TP08	260	169	215	25.4 / 56.0
DC105-12	27A	x	95	M8 + TP08	307	169	215	30.6 / 67.5
DC115-12	31A	x	104	M8 + TP08	328	172	220	33.2 / 73.2
DC140-12		x	126	M8 + TP08	341	172	283	43.1 / 95.0
DC150-12	GC12	x	127	M8 + TP08	327	182	273	43.3 / 95.5
DC160-12		x	142	M8	484	171	241	45.5 / 100.3
DC210-12-LT	4D	x	189	LT	530	209	218	60.8 / 134.1
DC210-12-APW	4D	x	189	APW	530	209	228	60.8 / 134.1
DC215-12	921	x	193	DT	381	178	371	60.0 / 132.3
DC260-12-LT	8D	x	234	LT	521	269	245	78.6 / 173.3
DC260-12-APW	8D	x	234	APW	521	269	255	78.6 / 173.3

FULL FORCE

DEEP CYCLE BATTERY

Full Force provides a high quality, true deep-cycle solution, manufactured in a state of the art factory that employs the latest in design principles, at a cost similar to flooded lead-acid batteries.



MODEL	GROUP SIZE	RC@25	C20	TERMINAL	LENGTH	DIMENSIONS in WIDTH	HEIGHT	WEIGHT kg/Lbs
FFD224-6	GC2	441	224	M8+TP	10.24	7.09	10.71	30.5 / 67.3
FFD245-6	DIN	457	245	M8+TP	9.57	7.40	10.83	33.5 / 73.85
FFD335-6	J305 / 902	751	335	DT	11.65	7.01	14.49	47.0 / 103.6
FFD400-6	L16 / 903	885	400	DT	11.65	7.01	16.77	56.0 / 123.5
FFD180-8	GC8	335	180	M8	10.24	7.17	10.71	32.3 / 71.2
FFD35-12	U1	52	35	M6	7.72	5.16	6.61	10.6 / 23.4
FFD55-12	22NF	96	55	M6	9.06	5.43	8.46	16.7 / 36.8
FFD85-12	24	145	85	M8+TP	10.24	6.61	9.33	25.0 / 55.1
FFD100-12	27	170	100	M8+TP	12.13	6.61	9.33	27.8 / 61.3
FFD105-12	27	175	105	M8+TP	12.13	6.61	9.33	30.0 / 66.2
FFD115-12	31	200	115	M8+TP	13.07	6.89	9.49	32.5 / 71.7
FFD140-12	DIN	260	140	M8+TP	13.43	6.81	11.30	42.5 / 93.70
FFD150-12	GC12	295	150	M8+TP	12.87	7.09	10.87	43.0 / 94.80
FFD210-12LT	4D	400	210	LT	20.94	8.11	9.13	58.5 / 129.0
FFD210-12APW	4D	400	210	DT	20.94	8.11	9.39	58.5 / 129.0
FFD215-12	921 / J185	420	215	DT	15.04	7.09	14.61	59.8 / 131.8
FFD260-12LT	8D	578	260	LT	20.47	10.55	9.63	75.0 / 165.4
FFD260-12APW	8D	578	260	DT	20.47	10.55	9.76	75.0 / 165.4



AN AGM BATTERY FOR EVERY APPLICATION.

FULL THROTTLE DUAL PURPOSE AGM BATTERY

Fullriver, and it's Full Throttle line is one of the very few manufacturers in the world to produce a battery that offers vigorous high-powered cranking, in a dual-purpose format to cover cyclic demands on the same battery. With thin-plate, pure-lead cell format, utilizing a highly optimized and refined active material, engineered to handle heavy vibration, the ideal formula for high performance in tough environments. Full Throttle is a true powerhouse, meeting all the energy needs your application demands.



MODEL	GROUP SIZE	CCA	C10	TERMINAL	DIMENSIONS mm			WEIGHT kg/Lbs	
					LENGTH	WIDTH	HEIGHT		
FT100	BTX9-BS	100	7	M6	138	86	102	3.2 / 3.2	
FT185	BTX15L-BS	185	13	M6	177	86	131	5.3 / 5.3	
FT200	B16L-B	200	13	M6M	170	99	157	6.3 / 6.3	
FT200L	B16-B	200	13	M6M	170	99	157	6.3 / 6.3	
FT230	BT19BL-BS	230	17.5	M6	181	77	167	7.4 / 7.4	
FT310-20L	BTX20L-BS	310	19	M5TAS	175	87	155.5	7.1 / 7.1	
FT230D	BT19BL-BS	180	21	M6	181	77	167	6.2 / 6.2	
FT265	B16CL-B	265	16	M6	170	99	175	7.4 / 7.4	
FT400-30L	BTX30L	400	29	M5TAS	166	130	175.5	10.4 / 10.4	
FT410	U1	410	25	M6+TP26	165	176	144	10.7 / 10.7	
FT410L	B30L-B	410	25	M6+TP26	165	176	144	10.7 / 10.7	
FT438-U1	U1	438	32	M6+TP26	196	131	192	11.5 / 11.5	
FT438-U1R	U1R	438	32	M6+TP26	196	131	192	11.5 / 11.5	
FT560	26R	560	38.5	M6+TP26	198	166	180	15.4 / 15.4	
FT560L	26	560	38.5	M6+TP26	198	166	180	15.4 / 15.4	
FT610-47	47	610	46	AP	241	175	190	19.5 / 19.5	
FT620-51	51	620	52	M8+TP28	229	138	230	18.6 / 18.6	
FT680-48	48	680	56	AP	278	175	190	22.3 / 22.3	
FT780-48	48	780	56	AP	278	175	190	23 / 23	
FT750-25	25	750	57.5	M8 + TP28	240	174	220	22.8 / 22.8	
FT750-35	35	750	57.5	M8 + TP28	240	174	220	22.8 / 22.8	
FT825-34	34	825	58	M8 + TP28	261	172	208	21.4 / 21.4	
FT825-78	78	825	58	M8 + TP28 + FR45	261	172	211	21.6 / 21.6	
FT840-24F	24F	840	69	AP	276	172	227	25.1 / 25.1	
FT840-24M	24M	840	69	DT Brass	276	172	227	25.1 / 25.1	
FT850-94R	94R	850	74	AP	314	174	190	26.2 / 26.2	
FT890-49	49	890	74	AP	353	175	190	28.5 / 28.5	
FT930-65	65	930	66	M8 + TP28	300	182	184	25 / 25	
FT965-27	27	965	90	DT Brass	307	169	237	32.5 / 32.5	
FT965-27F	27F	965	90	DT Brass	307	169	237	32.5 / 32.5	
FT1100-31ST	31T	1100	100	3/8" STUD	330	173	232	34.9 / 34.9	
FT1100-31	31A	1100	100	M8 + TP28	330	173	237	34.9 / 34.9	
FT1150-6T	6T	1150	112	M8 + TP28	280	265	225	39.6 / 39.6	
FT1250-4DLT	4DLT	1250	160	M8 + TP28	513	223	222	57.4 / 57.4	
FT1450-8D	8D	1450	208	M8 + TP28	517	274	243	74.2 / 74.2	



AN AGM BATTERY FOR EVERY APPLICATION.

FULL THROTTLE STARTING

MOTORSPORTS AGM BATTERY

For years, Full Throttle Battery has been no stranger to power sport recreation. In an effort to round out the industry's most complete line of AGM battery offerings, Full Throttle is proud to introduce it's FTS line. A complete catalog of direct OEM fitment AGM starting batteries specifically made for the power sports market. Whether you're carving a curvy canyon road on your sportbike, cruising the lake on your personal watercraft, or exploring the mountains on your UTV, Full Throttle FTS has your drop in battery solution.



MODEL	GROUP SIZE	CCA	C10	TERMINAL	DIMENSIONS mm			WEIGHT kg/Lbs
					LENGTH	WIDTH	HEIGHT	
FTSX-4L	BTX4L-BS	40	3	C	87	71	87	1.57 / 3.35
FTSZ-5S	BTZ5S	80	4	C	87	71	87	1.93 / 4.15
FTSX-5L	BTX5L-BS	65	5	C	107	71	107	2.06 / 4.41
FTSX-5HL	BTX5L-BS	80	5	C	107	71	107	2.13 / 4.56
FTSX-12N54B	12N5-4B	70	5	A	131	60	131	2.67 / 5.18
FTSX-12N53B	12N5-3B	70	5	A	131	60	131	2.41 / 5.18
FTSX-12N5.53B	12N5.5-3B	70	5.5	A	131	60	131	2.67 / 5.73
FTSZ-7S	BTZ7S	120	6	C	106	71	106	2.44 / 5.25
FTSX-7A	BTX7A-BS	105	7	C	94	87	94	2.85 / 6.13
FTSX-7L	BTX7L-BS	100	7	C	131	71	131	2.6 / 5.58
FTSX-7BB	B7B-B	100	8	A	131	60	131	3.03 / 6.50
FTSX-9B4	BT9B-4	130	8	C	107	71	107	3.22 / 6.90
FTSX-9	BTX9-BS	135	8	C	105	87	105	3.31 / 7.12
FTSX-9B	B7-A	130	9	A	134	76	134	3.67 / 7.85
FTSX-9LB	B9L-B	130	9	A	134	76	134	3.67 / 7.85
FTSZ-10S	BTZ10S	160	8.6	C	94	87	94	3.32 / 7.14
FTSX-12A	BT12A-BS	175	10	C	105	87	105	3.89 / 8.36
FTSX-12B4	BT12B-4	210	10	C	131	71	131	4.16 / 8.93
FTSX-12	BTX12-BS	180	11	C	131	87	131	4.54 / 9.72
FTSZ-14S	BTZ14S	210	11.2	C	111	87	111	4.12 / 8.86
FTSX-12AA	B12A-A	190	12	A	160	76	160	4.66 / 10.01
FTSX-12ALA	B12AL-A	190	12	A	160	76	160	4.66 / 10.01
FTSX-14	BTX14-BS	200	13	C	146	87	146	5.33 / 11.47
FTSX-14L	BTX14L	200	13	C	146	87	146	5.33 / 11.47
FTSX-16	BTX16-BS	230	15	C	162	87	162	5.95 / 12.74
FTSZ-16H	BTZ16H	240	16	C	146	87	146	5.85 / 12.00
FTSZ-14HL	BTX14L	240	16	C	146	87	146	5.85 / 12.52
FTSZ-20CH	BTX20CH-BS	250	18	C	162	87	162	6.68 / 14.35
FTSZ-19BL	BT19BL-BS	190	19	B	167	77	167	6.58 / 14.18
FTSX-20	BTX20-BS	270	18	C	156	87	156	6.95 / 14.88
FTSX-20L	BTX20L-BS	270	18	D	156	87	156	6.95 / 14.88
FTSZ-20H	BTZ20	320	20	C	156	87	156	7.62 / 16.36
FTSZ-20HL	BTZ20L	320	20	D	156	87	156	7.62 / 16.36
FTSX-30L	BTX30L	440	32	D	175	126	175	10.1 / 21.83

FULLRIVER
BATTERY



**UNCOMPROMISING
PERFORMANCE**
FOR ALL AGM APPLICATIONS.



FULLRIVERBATTERY.COM